

geolights

- innovations for a brighter future -

PAR Lite
LED STAGE LIGHT SERIES GEOLIGHTS, INC.

Physical Specifications




Dimension	L9.21" x W8.35" x D7.87"
Connections	3 Pin XLR Input & 3 Pin XLR Output
Material	Aluminum Alloy
Weight	4 Kg ± 5%
Rotary Angle	180°
Rotary Base	-30° ~ +30°
IP Rating	IP65 (Applicable for dry, wet, damp environments)

Electrical Specifications

Light Source	1W Power LED
LED Quantity	36 LED's
Input Voltage	100VAC ~ 256VAC
Input Current	0.20 A (Max)
Power Consumption	55W (Max)
Control System	DMX & Self Control

Optical Specifications

Lumens (Single LED)	Red: 44 lm	Green: 70 lm	Blue: 15 lm
Beam Angle	45°, 30°, 15°		
Wavelegnth	Red: 620-625	Green: 520-525	Blue: 470-475
Display	Digital Display of DMX channel assignment		

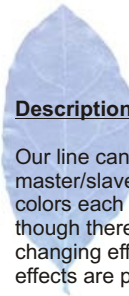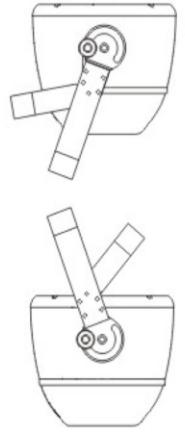

Description:

Our line can work independently, they can be tied together in a master/slave mode, or can be driven with a DMX controller. The colors each unit can generate depend upon the mode of operation, though there are a variety of mixes that can be achieved. Also color changing effects, solid colors, color fading, chasing and strobe effects are possible.

Each unit is crafted using an aluminum alloy yielding a durable architectural luminaries. This unit is available in a viewing angle of 45°, 30°, 15°.

Preloaded Colors: Red, Green, Blue, Magenta, Cyan, Yellow, and White.

Can choose 9 different preset intensity values for each color.

LCD Display to digitally assign DMX channel.

DMX512: 4 channels with intensity dimmer.

- Channel 1 - Red
- Channel 2 - Green
- Channel 3 - Blue
- Channel 4 - Intensity



Please call or email us for more information

Geolights, Inc. - USA
3040 Temple Ave, Suite 165
Pomona, CA 91766

Tel: 909.895.4697
Fax: 909.510.6308
info@geolights.com
www.geolights.com