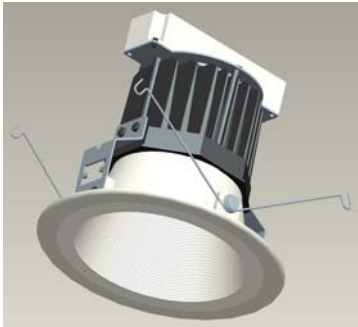
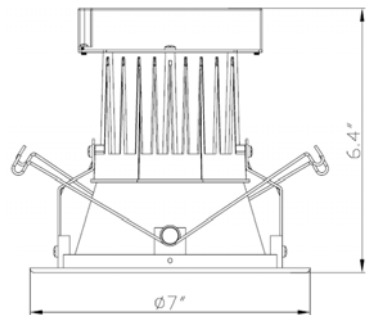


LED DOWNLIGHT SPECIFICATION

| PRODUCT PHOTO | | PRODUCT DRAWING | | |
|-----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------------------------------------------------|
|  | |  | | |
| Model | Vision 6 | Product Name | LED Downlight | |
| Application | Commercial lighting, Residential Lighting | | | |
| Watt | 15W | FEATURE * Installation to 6" downlight housing (Example: halo led housing H750ICAT); * High-power and high efficiency package LED, long life; * Excellent heat emission; * Energy saving, electricity consumption was only 20-30% of same luminous flux light; * Coated with polyester powders. | | |
| Size | Φ7"×6.4" | | | |
| Installation | 6" Downlight Housing | | | |
| Lamp Body | ABS And Aluminium Die-Casting | | | |
| Finish | Coated With Polyester Powders | | | |
| Lens Angle | n/a | | | |
| IP Class | IP20 | | | |
| TEST | HI-POT Test <input checked="" type="checkbox"/> | | | Temperature Test <input checked="" type="checkbox"/> |
| | Insulation Test <input checked="" type="checkbox"/> | | | Grounding Resistance Test <input checked="" type="checkbox"/> |
| | Leak Out Test <input checked="" type="checkbox"/> | | | Packing Test <input type="checkbox"/> |
| | IP65 Test <input type="checkbox"/> | | | |
| ELECTRONICAL SPECIFICATION | | PHOTODRIVE | | |
| Input Voltage | AC 100V~240V 50/60Hz | | | |
| Power Type | Constant Current Driver | | | |
| Constant Output Current | 720mA | | | |
| LED Qty | 1PC | | | |
| CCT | 3000K | | | |
| CRI | >85 | | | |
| Flux(LM) | 700lm | | | |

WWW.GEOLIGHTS.COM

COMMERCIAL & RESIDENTIAL LIGHTING